



EFFICIENTLY VERSATILE

DMM TRIPLE ATTACHMENT PULLEYS

This timeless classic continues to instill confidence and reliability within tree climbing and work positioning in conjunction with a friction hitch.

The hot forged swing-cheek pulley with an inbuilt 3-hole rigging plate ensures creative configurations whilst allowing direct connection to textile components to save on weight and complication.



HOTFORGED


FOR MORE INFORMATION CONTACT DMM:

Tel: +44 [0]1286 873 502
Fax: +44 [0]1286 872 090
Email: professional@dmmwales.com


DMM
PROFESSIONAL

FEATURES AND BENEFITS

- > 'Textile friendly' curves, high strength, low weight
- > Triple attachment holes helps organise single or multiple attachments
- > Fairlead flares help maintain high working efficiency
- > Rounded side plates edges maintain low rope abrasion when rope is fed 'unfair'
- > Compatible with most carabiner shapes and many textile connecting elements including rope and webbing
- > Size of attachment holes reduce probability of unwanted rotation of locking carabiners
- > Direct connection to textile components at the round edged attachment holes, helping to reduce system costs, increase lift height, minimise space required and enhance tolerance to torsion
- > Side plate shape allows an autoblock knot to function when the rope approaches the sides as well as at the bottom of the pulley
- > Hot forged aluminium side plates provide strength and durability
- > Heat treated stainless steel spindles for high strength and corrosion resistance
- > Pre lubricated sintered bronze bearings for ultra smooth operation
- > Riveted and tamperproof assembly
- > Rapide version incorporates roller bearing sheave for higher efficiency
- > Unique serial marking
- > Made in Wales, UK

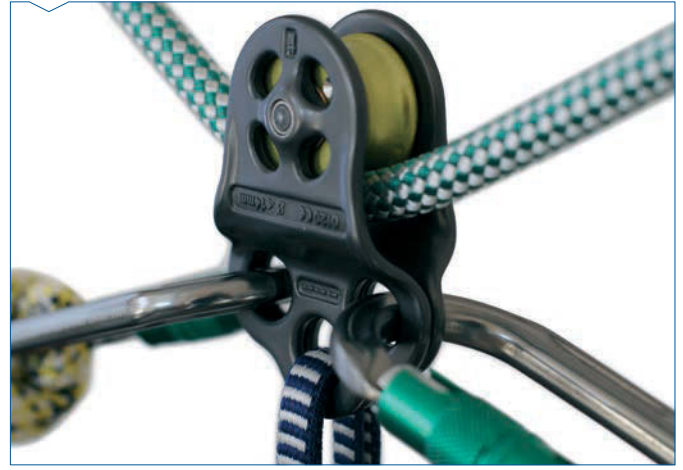

TECHNICAL SPECIFICATIONS

- > Certified to EN12278:2007 [Pulleys]. NFPA 1983 [2012] Class T rating
- > Side plates hot forged in aluminium alloy for high strength to weight ratio
- > Heat treated stainless steel spindle
- > Oilite bushing as standard or series ball bearing in Rapide version
- > Anodised to BS EN 7599:2010 AA10 Sealed for corrosion protection

SUGGESTED AREAS OF APPLICATION

- > Tree care: speedline and hauling set up
- > Rescue: stretcher suspension
- > Fall Protection
- > Lightweight rigging
- > Stretcher suspension
- > Temporary horizontal lifeline



Triple Attachment Pulleys PUL100RD & PUL100BLT



Triple Attachment (Rapide) Pulley PUL100RAPIDE

PRODUCT CODE	STRENGTH	DIMENSIONS	WEIGHT
PUL100RD (RED) TRIPLE ATTACHMENT PULLEY	30 kN	94 x 68 x 33 mm	133 g
PUL100BLT (GREY) TRIPLE ATTACHMENT PULLEY	30 kN	94 x 68 x 33 mm	133 g
PUL100RAPIDE (ROLLER BEARING VERSION)	30 kN	94 x 68 x 33 mm	135 g